



# Aritco 6000 Home Lift



## **Aritco 6000** **- our most versatile home lift**

Choose among several different sizes, glass walls and colours. This is the choice for those of you who would like to customise the lift to your own liking.

Several advantages offered by Aritco 6000:

- Design, sizes and options created for a home environment
- Minimum interventions in the house
- Option for a "half-height door" on the top floor
- 95% recyclable materials
- 'A' rated energy consumption according to VDI4707
- Patented screw/nut technology (no oil that can leak)
- The lowest maintenance and operating costs on the market




# Aritco 6000 Home Lift




Length

Width




**900 x 1040**




Hole through floor: 1330x1190 mm  
(No door on B-side: 1305x1190)  
Platform: 900x1040 mm  
Load: 250 kg

**900 x 1280**




Hole through floor: 1330x1430 mm  
(No door on B-side: 1305x1430)  
Platform: 900x1280 mm  
Load: 410 kg

**900 x 1480**

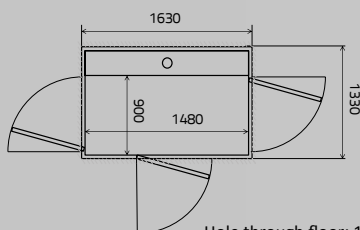


Hole through floor: 1330x1630 mm  
(No door on B-side: 1305x1630)  
Platform: 900x1480 mm  
Load: 410 kg

**1000 x 1280**




Hole through floor: 1430x1430 mm  
(No door on B-side: 1405x1430)  
Platform: 1000x1280 mm  
Load: 410 kg

**1000 x 1480**

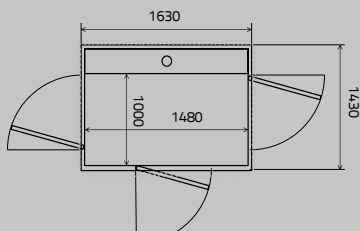

Hole through floor: 1430x1630 mm  
(No door on B-side: 1405x1630)  
Platform: 1000x1480 mm  
Load: 410 kg

**1100 x 1480**



Hole through floor: 1530x1630 mm  
(No door on B-side: 1505x1630)  
Platform: 1100x1480 mm  
Load: 410 kg

## Dimensions

**Platform width** ..... 900-1100 mm  
**Platform length** ..... 1040-1480 mm  
**Travel height** ..... 250-13000 mm

**Hole through floor width** ..... 1305-1530 mm  
**Hole through floor length** ..... 1190-1630 mm  
**Top height** ..... 2240 mm

**Height of door opening\*** .. 1800, 1900, 2000, 2100 mm  
**Height of door opening\*\*** ..... 1100-1600 mm  
**Width of door opening** ..... 800, 900 mm

\*Full-height door \*\*Half-height door

**Drive system:** Patented screw/nut system

**Rated speed:** max 0.15 m/s

**Platform control:** "Hold to run", the button has to be kept pressed during the ride

**Landing control:** One-touch call

**Technical compliance:** European Machinery Directive 2006/42/EC  
European standard EN 81-41

**Rated load:** 250-410 kg / 2-5 persons

**Number of stops:** max 6

**Number of doors:** max 2 doors per floor

**Pit:** 50mm (no pit is required when there is a threshold)

**Environment:** Indoors

**Power supply:** 1-phase 230V 50Hz/9A/16A slow  
3-phase 230V 50Hz/9A/16A slow  
3-phase 400V 50Hz/5.2A/16A slow

**Emergency lowering:** Battery-powered

**Control voltage:** 24V

**Motor:** 2.2 kW

For more information, please, refer to our product catalogue or visit our website.

Due to the continuous product development at the company, the information may change without prior notice.